


Pairen - Unpairen

Each unit is uniquely connected to a controller. If a controller must be replaced, the existing controller must first be unpaired. Leave the plug in the socket!

Unpairen

If the unit has already been paired once, it makes sense to unpair first:

- Remove the small screw at the bottom of the control panel.
- Carefully remove the back cover from the front.
- You will now see the back of the print. This is located a push button see red arrow.

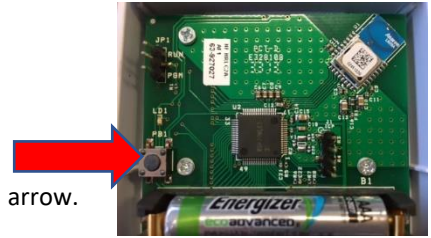

- Press and hold the push button on the control panel until the green LED has flashed 10x.
- Press the push button on the printed circuit board, the Power LED will flash. If this does not happen, also press the push button on the PCB and let the power LED flash 10x
- Now start procedure from above to pair.

First remove the plug from the socket, wait 10 seconds and put the plug back in the socket before pairing.

Pairing:

HomEvap

- At the bottom of the humidifier is a lid that is closed with a screw. Open it and carefully remove the cover.
- The printed circuit board has the same button as the control panel.
- Press it for 1 second, the Power LED will flash, 1 sec on/1 sec off.

Control panel

- Then press the button on the back of the control panel, a green LED will flash briefly.
- Check if the connection between Control Panel and EVAP is successful by pressing the MODE button.
- The RF symbol should be visible at the top left of the display to confirm they are linked!

